

- High performance
- Dual Band Wi-Fi 802.11a/b/g/n/ac
- TR-069
- 4 ports of LAN Fast Ethernet
- Customization
- USB device access via SMB and DLNA\*
- Guest Wi-Fi
- Wi-Fi EasyMesh



### Single access point

**RG-35 subscriber terminal** is an access point to modern interactive services through wired and wireless data transport networks.

### IPTV transmission through Wi-Fi at 5 GHz frequency

The device provides advanced functionality for stable IPTV delivery through wireless network: smooth and uninterrupted video playback is provided by special software functionality. The router allows operation at 2.4 and 5 GHz frequencies and also provides simultaneous video streams broadcast and data transmission.

### Simplified administration

Centralized configuration uploading, intelligent update of firmware and data collection on subscriber devices are realized in TR-069-based Eltex.ACS system. This system provides simplicity of Eltex CPE management and decreases operating expenses (OPEX) for network maintenance.

### Customization

The following means of customization are available: case color changing, logo placement, expansion of complete set and other options by additional requests.

### “Smart home” controller\*

The device includes «Smart home» controller, supporting the operation with sensors and devices by Z-Wave radio channel.


### Advantages of EasyMesh technology

- Network intelligence: a self-organizing and self-optimizing network collects information and responds to network conditions for maximum performance.
- Efficient load balancing: allows devices to switch to a better connection and avoid interference.
- Scalability: allows adding multi-vendor Wi-Fi EasyMesh access points.

### Interface configuration

	RG-35-Wac	RG-35-WZ
WAN	1x1000M	1x1000M
LAN	4x100M	4x100M
“Smart home” management controller	no	yes
USB	1xUSB2.0	1xUSB2.0
Wi-Fi	802.11a/b/g/n/ac/k/v	802.11a/b/g/n/ac/k/v

### RG-35-Wac and RG-35-WZ application diagram

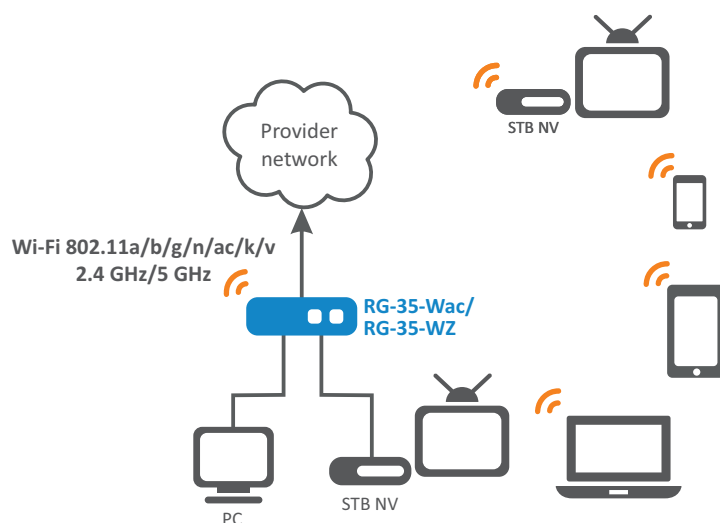

\*Available only for RG-35-WZ

## Features and capabilities

### Main technical parameters

- RAM 128 MB
- Flash 16 MB (RG-35-WZ, 32 MB)
- Linux OS

### Interfaces

- 1 port of WAN 10/100/1000Base-T (RJ-45)
- 4 port of LAN 10/100Base-T (RJ-45)
- 1 port of USB 2.0
- Wi-Fi IEEE 802.11b/g/n 2.4 GHz and 802.11a/n/ac 5 GHz
- «Smart home» interface — radio interface for «Smart home» system management

### Connection types

- Static IP address
- DHCP
- PPPoE

### Network features

- Support for MultiWAN
- Quality of Service (QoS)
- NAT
- Port forwarding
- Router/bridge mode operation
- DHCP server on the LAN side
- Firewall
- Static and dynamic routing
- Support for Dynamic DNS
- Support for local DNS
- Multiservice model: separate network parameters configuration per service: Internet, VoIP, IPTV\*
- Support for UPnP
- Support for IGMP
- Time synchronization via NTP
- Restriction of the access to the device via WAN and LAN
- Telnet
- IPv4, IPv6

### Wireless interface parameters

- WPA/WPA2 encryption standards
- Support for WMM
- Wireless Multicast Forwarding
- Wi-Fi IEEE 802.11a/b/g/n/ac/k/v
- Frequency: 2412-2472 MHz, 5180-5320 MHz, 5660-5825 MHz
- MIMO:
  - 2.4 GHz 2x2
  - 5 GHz 2x2
- Output power:
  - 2.4 GHz (802.11b/g/n): up to 15 dBm
  - 5 GHz (802.11a/n/ac): up to 17 dBm
- Receiver sensitivity
  - 2.4 GHz
    - MCS0: -90 dBm
    - MCS4: -79 dBm
    - MCS7: -72 dBm
  - 5 GHz
    - MCS0: -92 dBm
    - MCS4: -82 dBm
    - MCS7: -76 dBm

### Management and diagnostics

- WEB, support for HTTP and HTTPS\*
- TR-069 (Eltex.ACS is recommended)

### Physical specifications


- Power supply via 5.3V, 2.0A power adapter
- Maximum power consumption — 8 W
- Operating temperature range: +5 to +40°C
- Relative humidity: up to 80% (at +25°C)
- Dimensions: 150x110x27 mm
- Weight: 0.2 kg

\* Optional

## Ordering information

Name	Description
<b>RG-35-Wac</b>	RG-35-Wac subscriber terminal: 1xWAN,4xLAN, 1xUSB, Wi-Fi 802.11a/b/g/n/ac/k/v
<b>RG-35-WZ</b>	RG-35-WZ subscriber terminal: 1xWAN,4xLAN, 1xUSB, Wi-Fi 802.11a/b/g/n/ac/k/v, «Smart home» controller
<b>Related products</b>	
<b>RR-10</b>	Wireless signal repeater
<b>ACS-CPE-256</b>	ACS-CPE-256 option of Eltex.ACS system for Eltex CPE autoconfiguration: 256 subscriber devices
<b>ACS-CPE-512</b>	ACS-CPE-512 option of Eltex.ACS system for Eltex CPE autoconfiguration: 512 subscriber devices
<b>ACS-CPE-1024</b>	ACS-CPE-1024 option of Eltex.ACS system for Eltex CPE autoconfiguration: 1024 subscriber devices

### Contact us

  
+7 (383) 274 10 01  
+7 (383) 274 48 48

  
eltex@eltex-co.ru

  
www.eltex-co.com

### About Eltex

**Eltex** company is a leading Russian developer and manufacturer of telecommunication equipment with 25 years of history. Integrity of solutions and seamless integration capability into Customer infrastructure is a priority area of company development.