

- Bandwidth up to 176 Gbps
- Non-blocking architecture
- 4 ports of 10G
- L3 switches
- Stacking up to 8 devices
- Hot-swappable redundant power supplies
- Front-to-Back cooling



MES3300-48

The new generation switches can be used in service provider networks as aggregation or transport switches and in data centers as a Top-of-Rack switches.

They ensure high performance due to the interfaces operating at speeds of 10 Gbps or 1 Gbps. MES aggregation switches feature set includes L2 functions, static routing, dynamic routing, stacking of up to 8 devices, redundant and hot-swappable power supplies.

Support for the ERPS ring protection protocol enables convergence time of less than 200 ms, ensuring uninterrupted service.

Technical features

| | MES3300-48 | MES3300-48F |
|--------------------------------------|-------------------------------|--------------------|
| Interfaces | | |
| 10/100/1000BASE-T (RJ-45) | 48 | — |
| 1000BASE-X/100BASE-FX (SFP) | — | 48 |
| 10GBASE-R/1000BASE-X (SFP+/SFP) | 4 | |
| 10/100/1000BASE-T (OOB) | 1 | |
| Console port RS-232 (RJ-45) | 1 | |
| Performance | | |
| Bandwidth | 176 Gbps | |
| Throughput for 64 bytes ¹ | 130.95 MPPS | |
| Buffer memory | 3 MB | |
| RAM (DDR4) | 2 GB | |
| ROM (RAW NAND) | 512 MB | |
| MAC table | 16384 | |
| ARP table ² | 4087 | |
| VLAN table | 4094 | |
| L2 Multicast groups | 4092 | |
| SQinQ rules | 1320 (ingress), 1320 (egress) | |
| MAC ACL rules | 3000 | |
| IPv4/IPv6 ACL rules | 2999/1500 | |
| L3 IPv4 Unicast routes ³ | 13278 | |
| L3 IPv6 Unicast routes ³ | 3316 | |

¹ Values are given for one-way transmission.

² For each host in the ARP table, an additional entry is created in the switching table.

³ IPv4/IPv6 Unicast/Multicast routes share hardware resources.

Technical features (continued)

| | MES3300-48 | MES3300-48F |
|---|----------------------------|-------------|
| L3 IPv4 Multicast (IGMP Proxy, PIM) routes ¹ | 4087 | |
| L3 IPv6 Multicast (IGMP Proxy, PIM) routes ¹ | 1642 | |
| VRRP routers | 255 | |
| Maximum size of ECMP groups | 8 | |
| VRF number | 16 (including default VRF) | |
| L3 interfaces | 2050 | |
| Link Aggregation Groups (LAG) | 32, up to 8 ports per LAG | |
| Quality of Service (QoS) | 8 egress queues per port | |
| Jumbo frame size | 10240 bytes | |
| Stacking | 8 devices | |

Features and capabilities

Interface features

- Head-of-line blocking (HOL) protection
- Back Pressure
- Auto MDI/MDIX
- Jumbo Frames
- Flow Control (IEEE 802.3X)
- Port Mirroring (SPAN, RSPAN)
- Stacking

MAC address functions

- Independent learning mode per VLAN
- MAC Multicast Support
- Configurable aging time of MAC addresses
- Static MAC Entries
- MAC Flapping

VLAN support

- Voice VLAN
- 802.1Q
- Q-in-Q
- Selective Q-in-Q
- GVRP

L2 Multicast functions

- Multicast profiles
- Static Multicast groups
- IGMP Snooping v1,2,3
- Host/port-based IGMP Snooping Fast Leave
- Pim-Snooping
- IGMP proxy-report
- IGMP authorization through RADIUS
- MLD Snooping v1,2
- IGMP Querier
- MVR

L2 functions

- STP (Spanning Tree Protocol, IEEE 802.1d)
- RSTP (Rapid Spanning Tree Protocol, IEEE 802.1w)
- MSTP (Multiple Spanning Tree Protocol, IEEE802.1s)
- PVSTP+
- RPVSTP+
- Spanning Tree Fast Link option
- STP Root Guard
- BPDU Filtering
- STP BPDU Guard
- Loopback Detection
- ERPS (G.8032v2)
- Flex-link

- Private VLAN
- L2PT (Layer 2 Protocol Tunneling)

L3 functions

- Static IP routes
- RIPv2, OSPFv2, OSPFv3, IS-IS (IPv4 Unicast), BGP² (IPv4 Unicast, IPv4 Multicast)
- BFD protocol (for BGP)
- ARP (Address Resolution Protocol)
- Proxy ARP
- Policy-Based Routing (IPv4)
- VRRP
- Multicast dynamic routing protocols PIM SM, PIM DM, IGMP Proxy, MSDP
- ECMP Load Balancing
- IP Unnumbered
- VRF lite

Link Aggregation functions

- LAG group creation
- LACP
- LAG Balancing Algorithm
- MLAG (Multi-Switch Link Aggregation Group)

IPv6 support

- IPv6 Host
- Dual-stack IPv4, IPv6

Service functions

- VCT (Virtual Cable Testing)
- Optical transceiver diagnostics
- Green Ethernet

Security functions

- Protection against unauthorized DHCP servers (DHCP Snooping)
- DHCP option 82
- IP Source Guard
- Dynamic ARP Inspection
- First Hop Security
- sFlow
- MAC-based authentication, Port Security, Static MAC entries
- Port-based authentication IEEE 802.1x
- Guest VLAN
- DoS attack prevention
- Traffic segmentation
- DHCP clients filtering
- BPDU attack prevention
- NetBIOS/NetBEUI filtering

¹ IPv4/IPv6 Unicast/Multicast routes share hardware resources.

² BGP protocol support is provided under license.

Features and capabilities (continued)

Quality of Service (QoS)

- QoS statistics
- Shaping, policing
- IEEE 802.1p Class of Service
- Storm Control for different traffics (broadcast, multicast, unknown unicast)
- Bandwidth management
- Strict priority/Weighted Round Robin (WRR) scheduling algorithms
- Three marking colors
- ACL-based CoS/DSCP metric assignment
- ACL-based VLAN metric assignment
- Setting the IEEE 802.1p priority for management VLAN
- DSCP to CoS, CoS to DSCP remarking
- 802.1p DSCP metric assignment for IGMP

OAM

- 802.3ah Ethernet Link OAM
- 802.3ah Unidirectional Link Detection

Access Control Lists (ACL)

- L2-L3-L4 ACL (Access Control List)
- Time-Based ACL
- IPv6 ACL
- ACL based on:
 - Switch port
 - 802.1p priority
 - VLAN ID
 - EtherType
 - DSCP
 - Protocol type
 - TCP/UDP port number
 - User Defined Bytes

Management functions

- Upload/download of configuration file and firmware via TFTP/SCP
- SNMP (Simple Network Management Protocol)
- CLI (Command Line Interface)
- Web interface
- Syslog
- SNTP (Simple Network Time Protocol)
- Traceroute
- LLDP (802.1ab) + LLDP MED
- Input commands authorisation support via TACACS+ server
- Switch access control — Privilege levels for users
- Management ACL
- Management interface blocking
- Local authentication
- IP addresses filtering for SNMP
- RADIUS, TACACS+ (Terminal Access Controller Access Control System) clients
- SSH, Telnet server
- SSH, Telnet client
- SSL
- Macrocommands support
- CLI commands logging
- System log

- DHCP autoprovision
- DHCP Relay (Option 82)
- DHCP Option 12
- Debugging commands
- Rate limit of traffic to CPU
- Password encryption
- Password recovery
- Ping (IPv4/IPv6)


Monitoring functions

- Interface statistics
- RMON/SMON remote monitoring
- IP SLA
- CPU utilization monitoring per task and traffic type
- RAM monitoring
- Temperature monitoring
- TCAM monitoring

MIB/IETF

- RFC 1065, 1066, 1155, 1156, 2578 MIB Structure
- RFC 1212 Concise MIB Definitions
- RFC 1213 MIB II
- RFC 1215 MIB Traps Convention
- RFC 1493, 4188 Bridge MIB
- RFC 1157, 2571-2576 SNMP MIB
- RFC 1901-1908, 3418, 3636, 1442, 2578 SNMPv2 MIB
- RFC 1271, 1757, 2819 RMON MIB
- RFC 2465 IPv6 MIB
- RFC 2466 ICMPv6 MIB
- RFC 2737 Entity MIB
- RFC 4293 IPv6 SNMP Mgmt Interface MIB
- Private MIB
- RFC 3289 DIFFSERV MIB
- RFC 2021 RMONv2 MIB
- RFC 1398, 1643, 1650, 2358, 2665, 3635 Ether-like MIB
- RFC 2668 802.3 MAU MIB
- RFC 2674, 4363 802.1p MIB
- RFC 2233, 2863 IF MIB
- RFC 2618 RADIUS Authentication Client MIB
- RFC 4022 MIB for TCP
- RFC 4113 MIB for UDP
- RFC 2620 RADIUS Accounting Client MIB
- RFC 2925 Ping & Traceroute MIB
- RFC 768 UDP
- RFC 791 IP
- RFC 792 ICMPv4
- RFC 2463, 4443 ICMPv6
- RFC 4884 Extended ICMP to support Multi-Part Messages
- RFC 793 TCP
- RFC 2474, 3260 Definition of the DS field in the IPv4 and IPv6
- RFC 1321, 2284, 2865, 3580, 3748 Extensible Authentication Protocol (EAP)
- RFC 2571, RFC2572, RFC2573, RFC2574 SNMP
- RFC 826 ARP
- RFC 854 Telnet
- IEC 61850

Use case

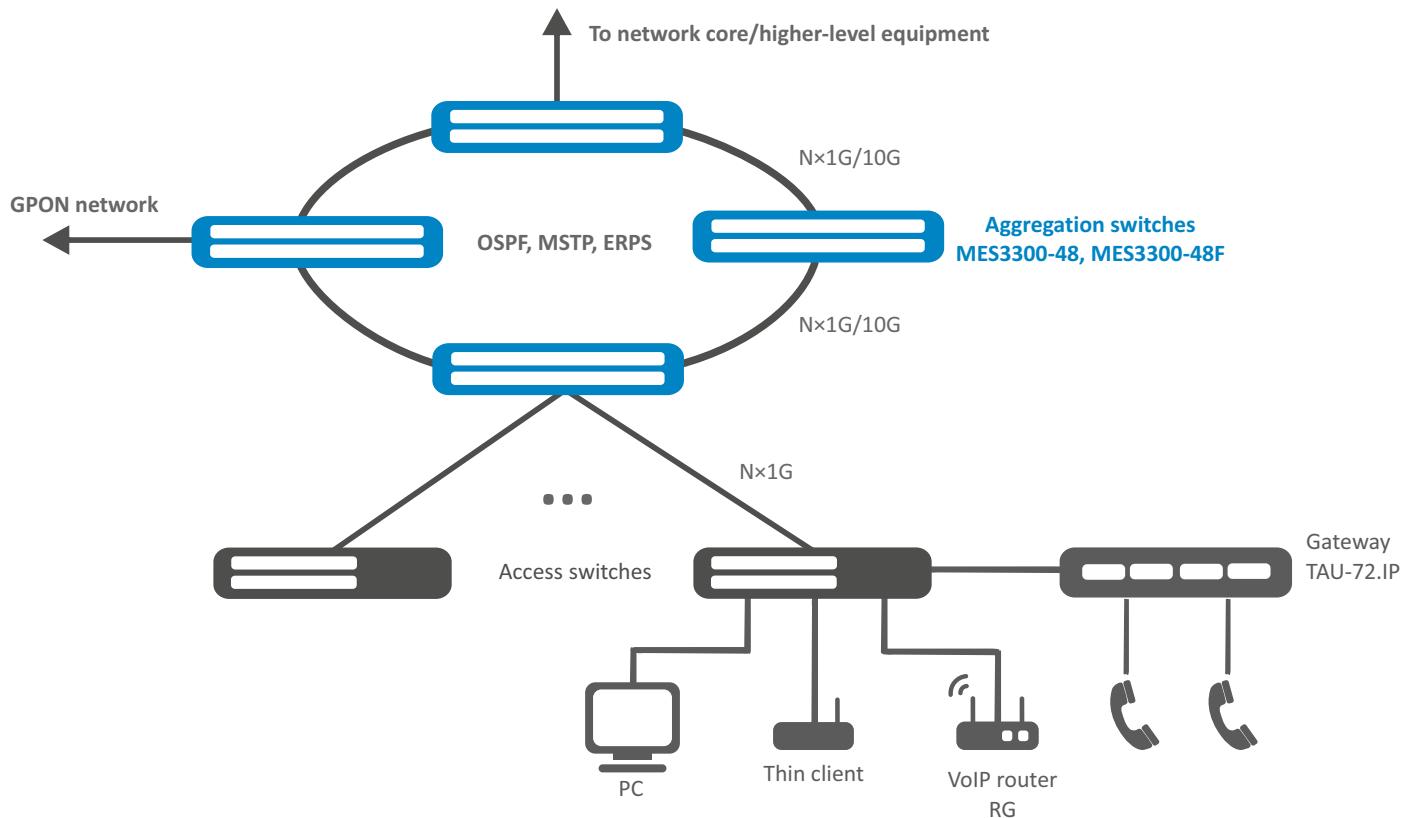

Physical parameters

| | MES3300-48 | MES3300-48F |
|---------------------------|---|--------------------------------------|
| Power supply | 100–240 V AC, 50–60 Hz 36–72 V DC Power supply options: <ul style="list-style-type: none">• 1 AC/DC power supply• 2 hot-swappable AC/DC power supplies | |
| Input current | 0.3–0.5 A for AC 0.5–1.0 A for DC | 0.3–1.0 A for AC 1.0–2.2 A for DC |
| Maximum power consumption | 45 W | 89 W |
| Heat dissipation | 45 W | 89 W |
| Dying Gasp support | | no |
| Operating temperature | | from -10 to +45 °C |
| Storage temperature | | from -50 to +70 °C |
| Operating humidity | | no more than 80 % |
| Cooling | | Front-to-Back, 4 fans |
| Form factor | | 19", 1U |
| Dimensions (W × H × D) | 440 × 44 × 330 mm | 440 × 44 × 330 mm |
| Weight | 5.67 kg | 5.68 kg |

Ordering information

| Name | Description |
|--------------------|--|
| MES3300-48 | MES3300-48 Ethernet switch, 1×10/100/1000BASE-T (OOB), 48×10/100/1000BASE-T (RJ-45), 4×10GBASE-R (SFP+)/1000BASE-X (SFP), L3 |
| MES3300-48F | MES3300-48F Ethernet switch, 48×1000BASE-X/100BASE-FX (SFP), 4×10GBASE-R/1000BASE-X (SFP+/SFP), L3 |

Related products

| | |
|---------------------|--|
| PM160-220/12 | PM160-220/12 power module, 100–240 V AC, 160 W |
| PM100-48/12 | PM100-48/12 power module, 36–72 V DC, 100 W |

Related software

| | |
|-------------------------|---|
| ECCM-MES3300-48 | ECCM-MES3300-48 option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES3300-48 |
| ECCM-MES3300-48F | ECCM-MES3300-48F option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES3300-48F |

Contact us

 +7 (383) 274 10 01
+7 (383) 274 48 48

 eltex@eltex-co.ru

 www.eltex-co.com

About ELTEX

ELTEX Enterprise is a leading Russian developer and manufacturer of communication equipment with 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.